
JK SERIES

Unique high-grade appearance, stable quality, cost-effective





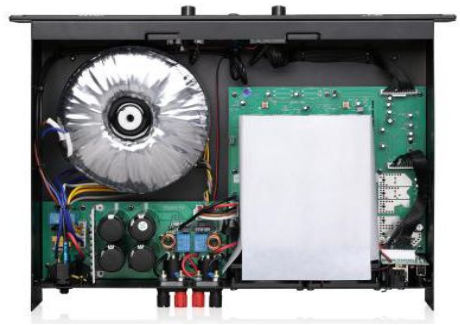

*JK series tradition power amplifier have excellent continuous output capacity and provide us traditional excellent sound quality.
* 2 channels 2U high-performance and multi-function design.
* Perfect circuit protection design: power-on buffer, overheating protection, short circuit protection, pressure limit protection, over current protection, over load protection, output DC protection.
* With cost-effective, highly reliable and unique high-grade design appearance is favored by the majority of customers.
* Applications for indoor and outdoor: Entertainment or multimedia.

JK 系列具有独特的高档的设计外观，质量稳定可靠，性价比高

*JK 系列传统功放具有极佳的持续输出能力并为我们提供传统风格的优秀音质。
*2 通道 2U 高性能兼备多功能设计。
*完善的电路保护设计：接上电源的缓冲、过热保护、短路保护、限压保护、过流保护、过载保护、输出直流保护。
*性价比高，质量稳定可靠以及独特的高档的设计外观深受广大用户的喜欢。
*适用范围：娱乐工程和多媒体等。

产品型号 / MODEL NO.	JK450B	JK600B	JK800B	JK1000B
8Ω 立体声输出功率 / 8Ω Stereo Output Power	450W	600W	800W	1000W
4Ω 立体声输出功率 / 4Ω Stereo Output Power	650W	800W	1000W	1350W
8Ω 桥接 / 8Ω Bridged watts	1300W	1750W	2350W	2950W
输出线路 / Output Circuit	AB	H	H	H
高度 / Height	2U			
频响 / Frequency response	20Hz-20KHz, +0/-1dB			
总谐波失真/ THD+N	<0.5%, 20Hz-20KHz			
信噪比 / S/N Ratio	>100dB			
转换速率 / Slew Ratio	>10v/us			
阻尼系数 / Damping factor	>200			
分离度 / Crosstalk	At 1kHz, -75dB; At 20kHz, -59dB			
输入灵敏度 / Input sensitivity	0.775V/1.4V			
输入阻抗 / Input impedance	20KOhm(Balance)/10KOhm(Unbalance)			
输入接口 / Input connector	XLR, RCA			
输出接口 / Output connector	Binding posts, Speakon			
前板控制 / Front panel control	AC Power Switch, LED(Clip, Signal, Protect, Active),2 channels volume			
后板控制 / Rear panel control	Input Mode Switch: Stereo/Parallel/Bridge, Sensitivity			
冷却 / Cooling	Variable Speed Fans,Front-To-Rear Airflow			
机身尺寸 / Dimension	480mm * 320mm * 90mm			
净重 / Net weight	12.55 KG	13.05 KG	13.55 KG	14.05 KG
毛重 / Gross weight	14.95 KG	15.45 KG	15.95 KG	16.45 KG
包装尺寸 / Packing dimension	577mm * 558mm * 160mm			